


**NOTE:** WHEN EXISTING BITUMINOUS STREET PAVEMENT IS INPLACE, SAW CUT AND REMOVE EXISTING PAVEMENT 6" MINIMUM FROM LIP OF GUTTER. PLACE BITUMINOUS PATCH TO MATCH EXISTING PAVEMENT SECTION.

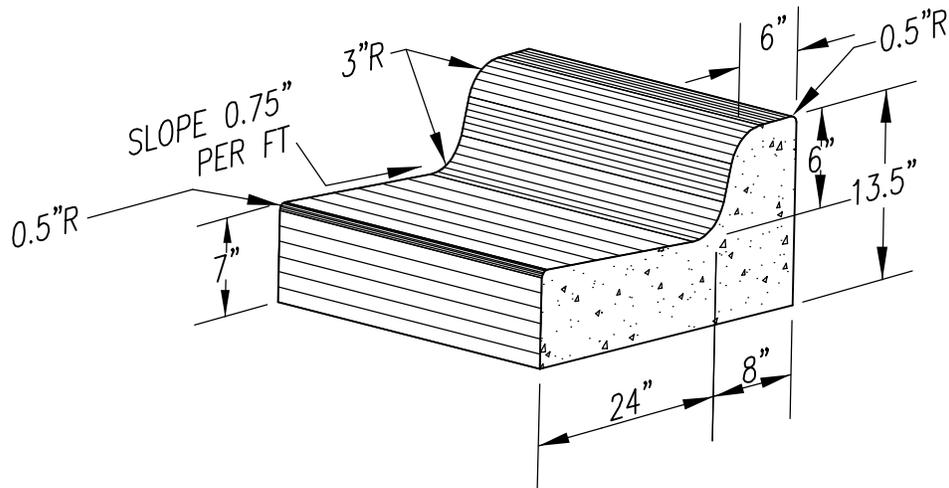

**NOTE:**

1. THE CONCRETE CURB & GUTTER SHALL BE CONSTRUCTED ON 6" AGGREGATE BASE, CL. 5 (2211) (100% CRUSHED LIMESTONE) (INCIDENTAL TO CURB & GUTTER)

CONCRETE CURB & GUTTER DETAIL  
DESIGN B624  
 NOT TO SCALE  
 PLATE 7002

**CONCRETE CURB & GUTTER  
 DESIGN B624**

STANDARD DETAIL  
 PLATE NO:  
**7002**

APPROVED: ADOPTED BY CITY COUNCIL ON JANUARY 12, 2004

REVISED: REVISION ADOPTED BY CITY COUNCIL ON MARCH 9, 2009

REMARKS:

**SAINT PETER UTILITY STANDARD DETAIL**



**CITY OF**  
*Saint Peter*  
 NICOLLET COUNTY, MINNESOTA  
 WHERE HISTORY & PROGRESS MEET