
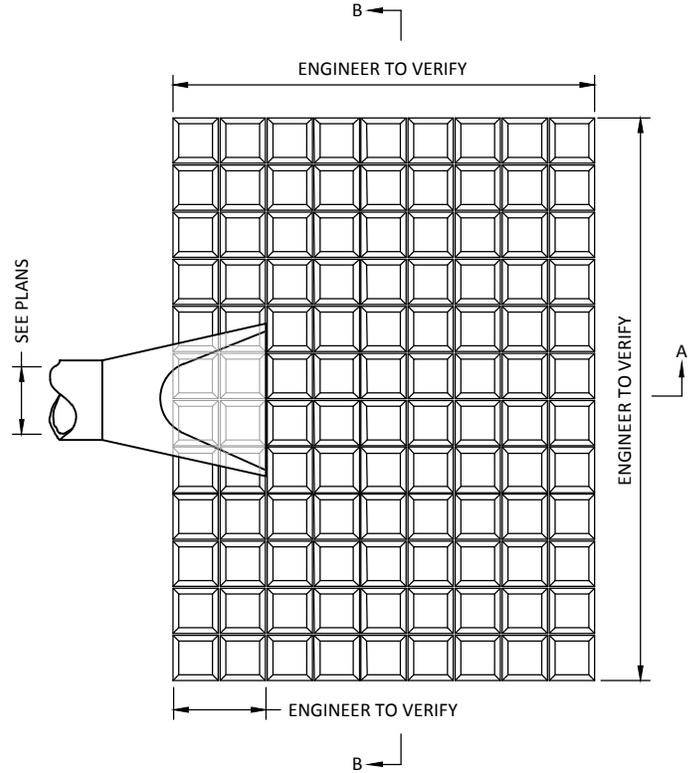


- 1] ARTICULATED BLOCK TO BE PLACED FROM DOWN STREAM END GOING UPSTREAM. FABRIC INSTALLED TO BE PULLED TAUT TOWARDS THE UPSTREAM END PRIOR TO PLACEMENT OF NEXT BLOCK SECTION.
- 2] GEOTEXTILE FILTER, TYPE IV (MNDOT 2511 / 3733 INCIDENTAL) SHALL COVER THE AREA OF THE ARTICULATED BLOCK AND EXTEND UNDER THE CULVERT APRON THREE FEET.
- 3] THE LAST 3.5' OF GEOTEXTILE FILTER ON THE DOWN STREAM END IS TO BE DUG INTO THE EXISTING GROUND.

CONSTRUCTION NOTE:

- TOP SOIL TO BE PLACED LEVEL WITH TOP OF BLOCK AND SEEDED WITH MNDOT SEED MIX NO. 250GR TOPSOIL SHALL BE PLACED IN MANNER TO MINIMIZE ANY SETTLEMENT OF BLOCKS OR SOIL
- BLOCKS TO BE INSTALLED ACCORDING TO MANUFACTURERS RECOMMENDATIONS

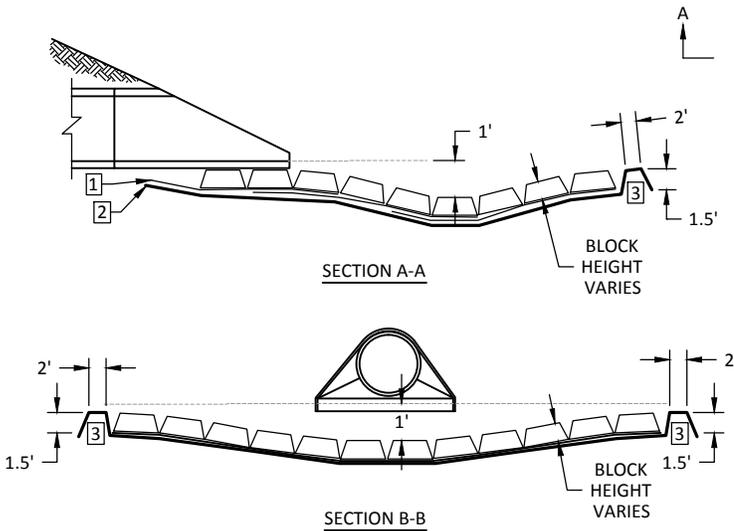

FLARED END - ARTICULATED CONCRETE

NOT TO SCALE
 SAINT PETER STANDARD
 PLATE 3020

**FLARED END
 ARTICULATED CONCRETE**

STANDARD DETAIL
 PLATE NO:
3020

APPROVED: ADOPTED BY CITY COUNCIL ON FEBRUARY 27, 2017

REVISED:

REMARKS:

SAINT PETER UTILITY STANDARD DETAIL

