


PAYMENT SHALL INCLUDE ALL MATERIALS, FILLING OF LOG, PLACEMENT, MAINTENANCE & REMOVAL; 80% OF BID PRICE SHALL BE PAID UPON PROPER PLACEMENT WITH THE FINAL 20% PAID UPON REMOVAL

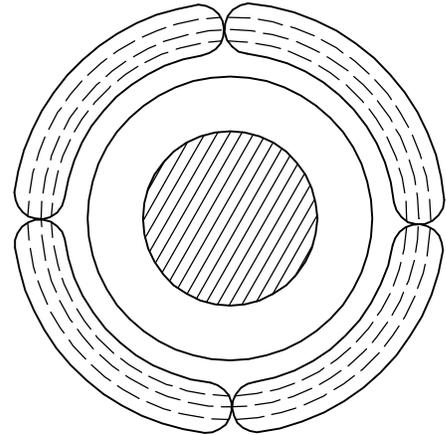


**NOTE:**  
THIS INLET PROTECTION IS USED DURING ROUGH GRADING ONLY, USE BEFORE ROAD IS OPEN TO TRAFFIC OR IS PAVED

FILL ROCK LOG WITH 45 LBS. OF OPEN GRADED AGGREGATE CONSISTING OF SOUND, DURABLE PARTICLES OF CRUSHED QUARRY ROCK OR GRAVEL CONFORMING TO THE FOLLOWING GRADATION.

GRADATION	
SIEVE SIZE	PERCENT PASSING
1 1/2"	100
1"	95-100
3/4"	65-95
3/8"	30-65
NO 4	10-35
NO 10	3-20
NO 40	0-8
NO 200	0-3

**NOTE:**  
CRUSHED CONCRETE OR BITUMINOUS SHALL NOT BE USED FOR OPEN GRADED AGGREGATE.

ENDS SECURELY CLOSED TO PREVENT LOSS OF OPEN GRADED AGGREGATE FILL, SECURED WITH 50 PSI ZIP TIE

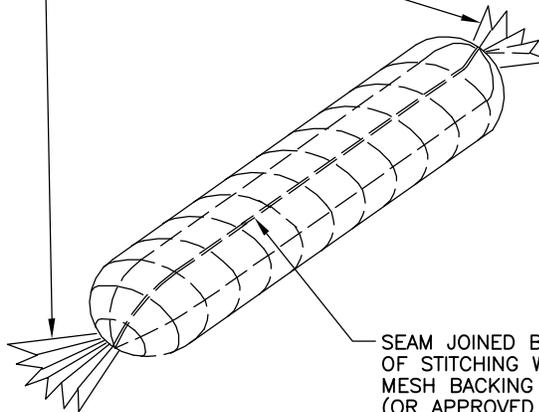

**INLET PROTECTION WITH ROCK LOG**

5"Ø GEOTEXTILE SOCK, TYPE WOVEN MONOFILAMENT CONFORMING TO SPEC. 3886 TABLE 3886-1. MACHINE SLICE

**INLET PROTECTION ROCK BAG**  
NOT TO SCALE

# INLET PROTECTION ROCK BAG

STANDARD DETAIL  
PLATE NO:  
**3015**

APPROVED: ADOPTED BY CITY COUNCIL ON MARCH 23, 2009

REVISED:

REMARKS:

**SAINT PETER UTILITY STANDARD DETAIL**

